

August 29, 2022

City of Sedona
102 Roadrunner Drive
Sedona, AZ 86336

RE: *Traffic Statement, Sedona Uptown Parking Garage, Sedona, AZ*

This traffic statement is prepared to support the design of a new 272-space parking garage north of Forest Road and west of SR 89A, in Sedona, AZ. This Traffic Statement reviews proposed parking garage access, vehicle routing re-allocation, and capacity analysis.

SITE BACKGROUND

A new 272-space parking garage is proposed north of the existing portion of Forest Road. The garage is intended to alleviate congested parking lots throughout Uptown and provide a centralized parking area to reduce additional traffic in Uptown due to wandering to locate parking.

Forest Road currently extends west of SR 89A in Uptown. A separate project proposes to extend Forest Road to the south to connect to SR 89A west of SR 179/Y and SR 89A/Brewer Road roundabouts. The new roadway extension will provide additional access to SR 89A for visitors parking on Forest Road.

Adjacent to the proposed parking garage, Forest Road will consist of a three-lane section, one through lane in each direction and a center two-way left-turn lane. At the existing intersection with Forest Road east of the proposed garage, SR89A is a three-lane roadway with two travel lanes in the southbound direction and one in the northbound direction. The speed limit is 25 miles per hour adjacent to the Forest Road/SR89A intersection.

Figure 1 shows the location of the project.



Figure 1 – Project Location

VEHICLE ROUTE RE-ALLOCATION

Traffic Data Collection

Turning movement counts were collected Saturday, March 20, 2021 at the existing intersection of Forest Road and SR 89A as part of the Sedona Uptown VISSIM modeling project. As part of the modeling project the data was balanced regionally to provide a peak hour for the entire system.

Cellphone-based AirSage Mobility Data was utilized to estimate the number of trips that would divert to the new Forest Road connection as an alternate route to/from Uptown and west Sedona. In the peak hour it was estimated that **61 vehicles per hour (vph)** will utilize the new Forest Road connection to bypass the SR 179/"Y" and SR 89A/Brewer Road roundabouts. **34 vph** of these trips are from Uptown and **27 vph** of these trips are to Uptown. These trips were also reallocated in the network for existing volumes.

This balanced data was utilized as existing count data in this analysis. Existing data is summarized in **Figure 2**.

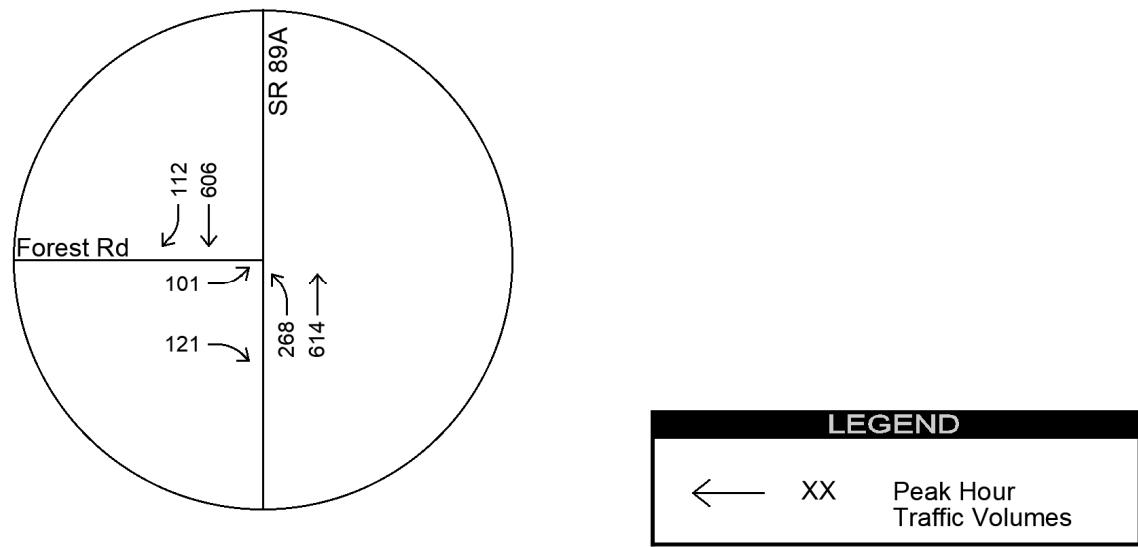


Figure 2 – 2021 No-Build Traffic Volumes

Parking Garage Trips

The parking garage is anticipated to generate minimal new trips to the Uptown area. Rather existing vehicles parking in lots throughout Uptown would now route to the 272-space parking garage instead of dispersed surface lots. In order to estimate the number of trips utilizing the new parking garage in an hour the following assumptions were made:

- The new parking garage is estimated to turnover approximately **100 vehicles per hour (vph)**.
- It is assumed that 50% of traffic (50 vph) will access the parking garage from Forest Road approaching from the west (using the new Forest Road connection), and 50% (50 vph) from the east on existing Forest Road.

From among the 50 trips that will utilize the existing intersection of Forest Road/SR 89A it is anticipated that 25% (12 trips) are diverted from parking on and south of Forest Road while 75% (38 trips) are diverted from existing parking all throughout Uptown.

The through traffic on Forest Road was estimated using balanced approach volumes at the Forest Road/SR 89A intersection. It is assumed that vehicles entering and exiting Forest Road between the intersection and the proposed parking garage are consistent enough that this is an acceptable method.

The parking garage is proposed with three access drives, two egress only (Driveway A and Driveway C) and one ingress only (Driveway B). Driveway A represents the westernmost egress and Driveway C represents the easternmost egress. Driveway B is the center ingress.

Based on the above distribution, intersection turning movement counts were developed and summarized in **Figure 3**.

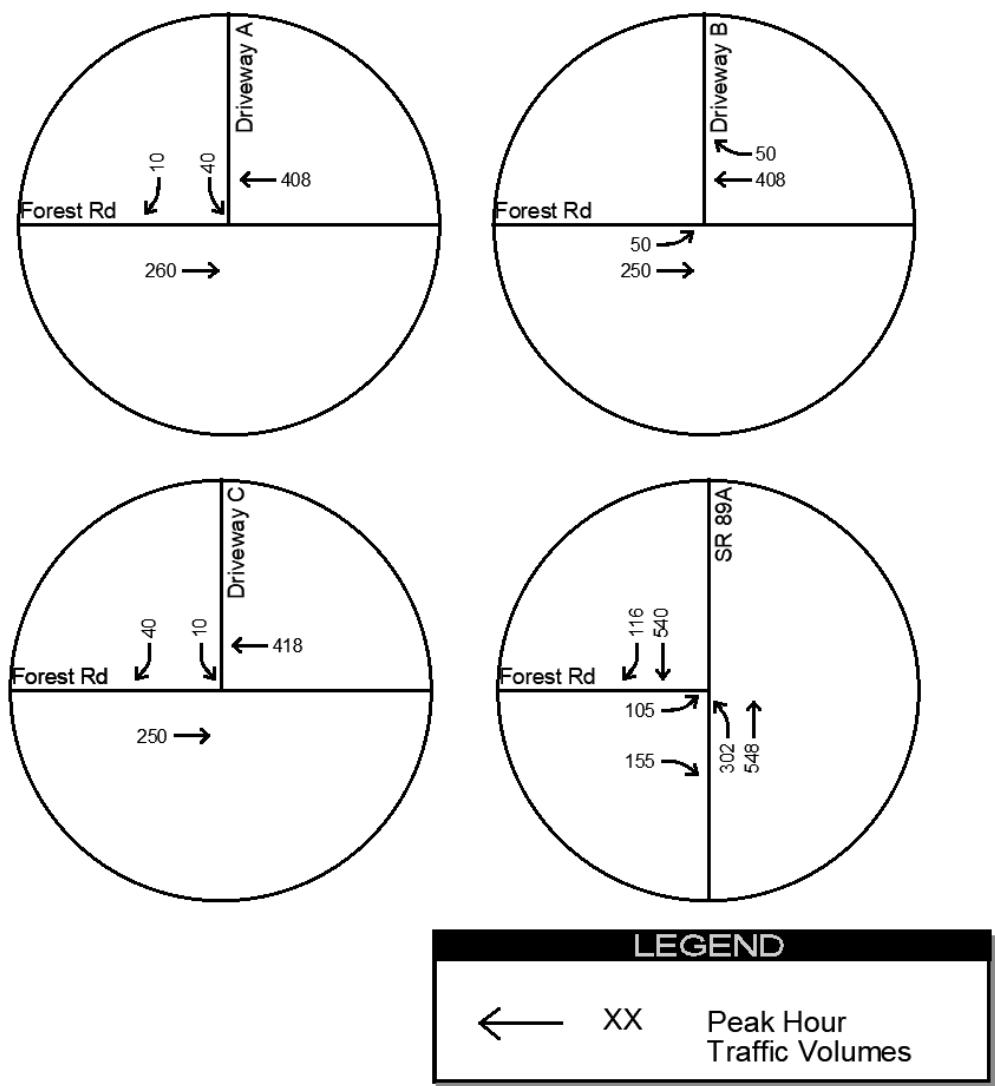


Figure 3 – 2021 Build Traffic Volumes**LEVEL OF SERVICE ANALYSIS**

The LOS for the intersection of Forest Road and SR 89A was calculated using HCM 6th Edition methodology and Synchro 10 analysis software. **Table 1** summarizes the 2021 LOS results for both the no-build (not including the parking garage) and build (including the parking garage) scenarios. Both scenarios show the peak hour LOS. **Table 2** summarizes the 2021 LOS results for the parking garage access drives. Delay is rounded to the nearest whole second. LOS analysis worksheets are included in an attachment.

Table 1 – 2021 Forest Road and SR 89A LOS Analysis Summary

| Scenario | EB Forest Road | | | NB SR 89A | | | SB SR89A | | | Total |
|----------|----------------|---|------|-----------|------|---|----------|------|-----|-------|
| | L | T | R | L | T | R | L | T | R | |
| No-Build | C/35 | | B/10 | B/11 | C/23 | | | B/19 | A/9 | B/19 |
| Build | C/35 | | B/10 | B/11 | C/20 | | | B/17 | A/9 | B/17 |

Table 2 – 2021 Access Drive LOS Analysis Summary

| Driveway | EB Forest Road | | | WB Forest Road | | | SB Driveway | | | |
|------------|----------------|---|---|----------------|---|---|-------------|---|------|--|
| | L | T | R | L | T | R | L | T | R | |
| Driveway A | | - | | | - | | B/13 | | B/11 | |
| Driveway B | A/9 | - | | | - | - | | | | |
| Driveway C | | - | | | - | | B/12 | | B/12 | |

5-YEAR HORIZON

The 2018 City of Sedona TMP estimates that traffic volumes in the Uptown area have historically grown approximately 2% per year. To estimate a 5-year horizon, 2% annual growth for 5 years was applied to the traffic volumes throughout the network.

Based on the above traffic growth, future no-build 2026 intersection turning movement counts are summarized in **Figure 4** and future build 2026 volumes are summarized in **Figure 5**.

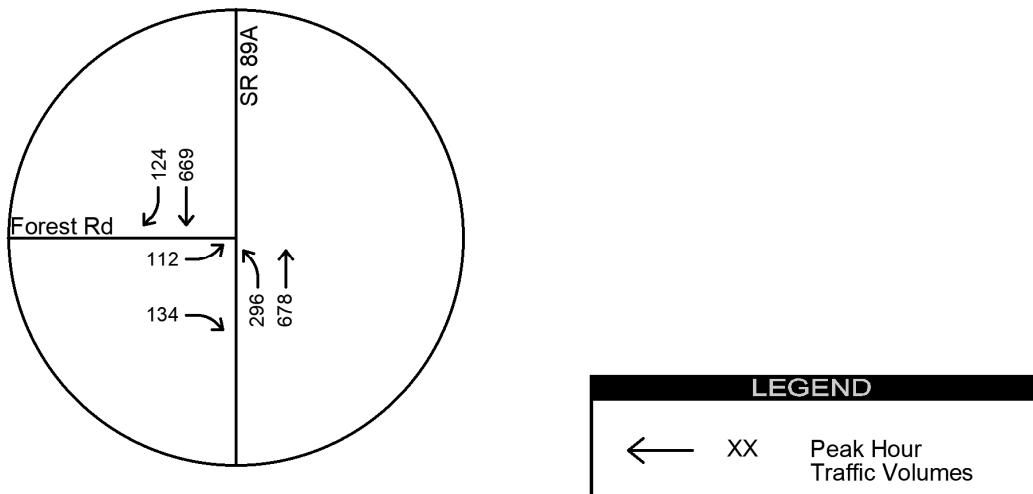
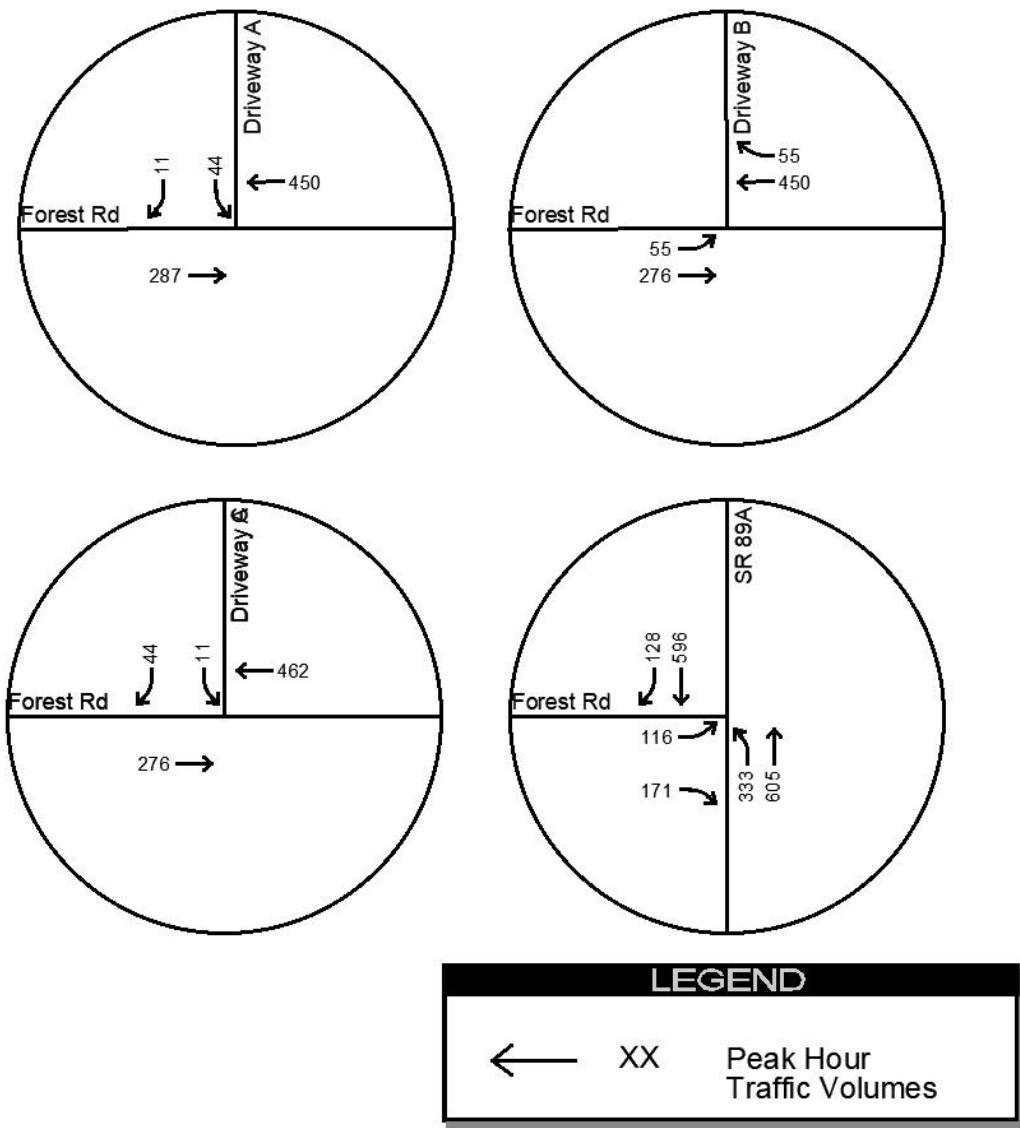


Figure 4 – 2026 No-Build Traffic Volumes**Figure 5 – 2026 Build Traffic Volumes**

2026 LEVEL OF SERVICE ANALYSIS

Table 3 and **Table 4** summarize the 2026 LOS results. Delay is rounded to the nearest whole second. LOS analysis worksheets are included in an attachment.

Table 3 – 2026 Forest Road and SR 89A LOS Analysis Summary

| Scenario | EB Forest Road | | | NB SR 89A | | | SB SR89A | | | Total |
|----------|----------------|---|------|-----------|------|---|----------|------|------|-------|
| | L | T | R | L | T | R | L | T | R | |
| No-Build | D/37 | | B/10 | B/14 | C/34 | | | C/33 | B/11 | C/28 |
| Build | D/38 | | B/10 | B/15 | C/27 | | | C/23 | B/11 | C/22 |

Table 4 – 2026 Access Drive LOS Analysis Summary

| Driveway | EB Forest Road | | | WB Forest Road | | | SB Driveway | | |
|------------|----------------|---|---|----------------|---|---|-------------|---|------|
| | L | T | R | L | T | R | L | T | R |
| Driveway A | | - | | | - | | B/14 | | B/12 |
| Driveway B | A/9 | - | | | - | - | | | |
| Driveway C | | - | | | - | | B/13 | | B/13 |

RIGHT TURN LANE ANALYSIS

A right turn lane warrant analysis was completed for the Forest Road parking garage entrance drive (Driveway B) using 2026 projected traffic volumes. The analysis presented in **Table 5** and based on criteria in **Figure 6** shows that a dedicated right turn lane on westbound Forest Road at the proposed entrance drive is not warranted.

Table 5 – Right Turn Lane Warrant Analysis

| Analysis Period | Speed Limit | PM Peak Hour | | | Criteria Met? |
|-----------------|-------------|-----------------------------------|--------------------|--|---------------|
| | | Major Road Volume (one direction) | Right-Turn Volumes | | |
| 2026 | 25 | 450 | 55 | | No |

| Peak Hour Traffic Volume on the Highway in Advancing Direction | Minimum Peak Hour Right-turn Traffic Volume | | | | |
|--|---|-----------------------|-----------------------|-----------------------|------------|
| | # of thru lanes per direction | | | | |
| | 1 | | 2 | | 3 |
| | < 45 MPH Posted Speed | ≥ 45 MPH Posted Speed | < 45 MPH Posted Speed | ≥ 45 MPH Posted Speed | All Speeds |
| ≤ 200 | | | | | |
| 201 – 300 | - | 30 | - | - | - |
| 301 – 400 | - | 19 | - | 55 | - |
| 401 – 500 | 85 | 14 | - | 30 | - |
| 501 – 600 | 58 | 12 | 140 | 25 | - |
| 601 – 700 | 27 | 9 | 80 | 18 | - |
| 701 – 800 | 20 | 8 | 53 | 15 | - |
| 801 – 900 | 12 | 7 | 40 | 12 | - |
| 901 – 1000 | 9 | 6 | 30 | 11 | - |
| 1001 – 1100 | 8 | 5 | 23 | 9 | 18 |
| 1101 – 1200 | 7 | 5 | 18 | 8 | 16 |
| 1201 – 1300 | 6 | 4 | 14 | 8 | 15 |
| 1301 – 1400 | 6 | 4 | 11 | 6 | 12 |
| 1400+ | 5 | 3 | 8 | 6 | 10 |

Figure 6 – ADOT TGP 245: Right Turn Lane Criteria

RECOMMENDATIONS

The proposed 272-space parking garage on Forest Road is anticipated to pull existing traffic parking throughout Uptown to the new centralized location, reducing circulating traffic and reallocating traffic through the Forest Road/SR 89A intersection. The parking garage is not anticipated to degrade the intersection LOS at Forest Road/SR 89A.

The parking garage also proposes three access driveways, two egress only and one ingress only. The proposed driveways are anticipated to accommodate the parking garage traffic. The ingress drive, Driveway B, does not meet ADOT TGP warrants for an exclusive right turn lane. It is recommended that a center two-way left turn lane be constructed to accommodate westbound left turn traffic into Driveway B.

Please let me know if you have any questions. I can be reached at 928-458-7121 or andrew.baird@kimley-horn.com.

Sincerely:




Andrew Baird, PE

Attachments

*Attachment 1 – Garage Site Plan
Attachment 2 – Synchro Reports*



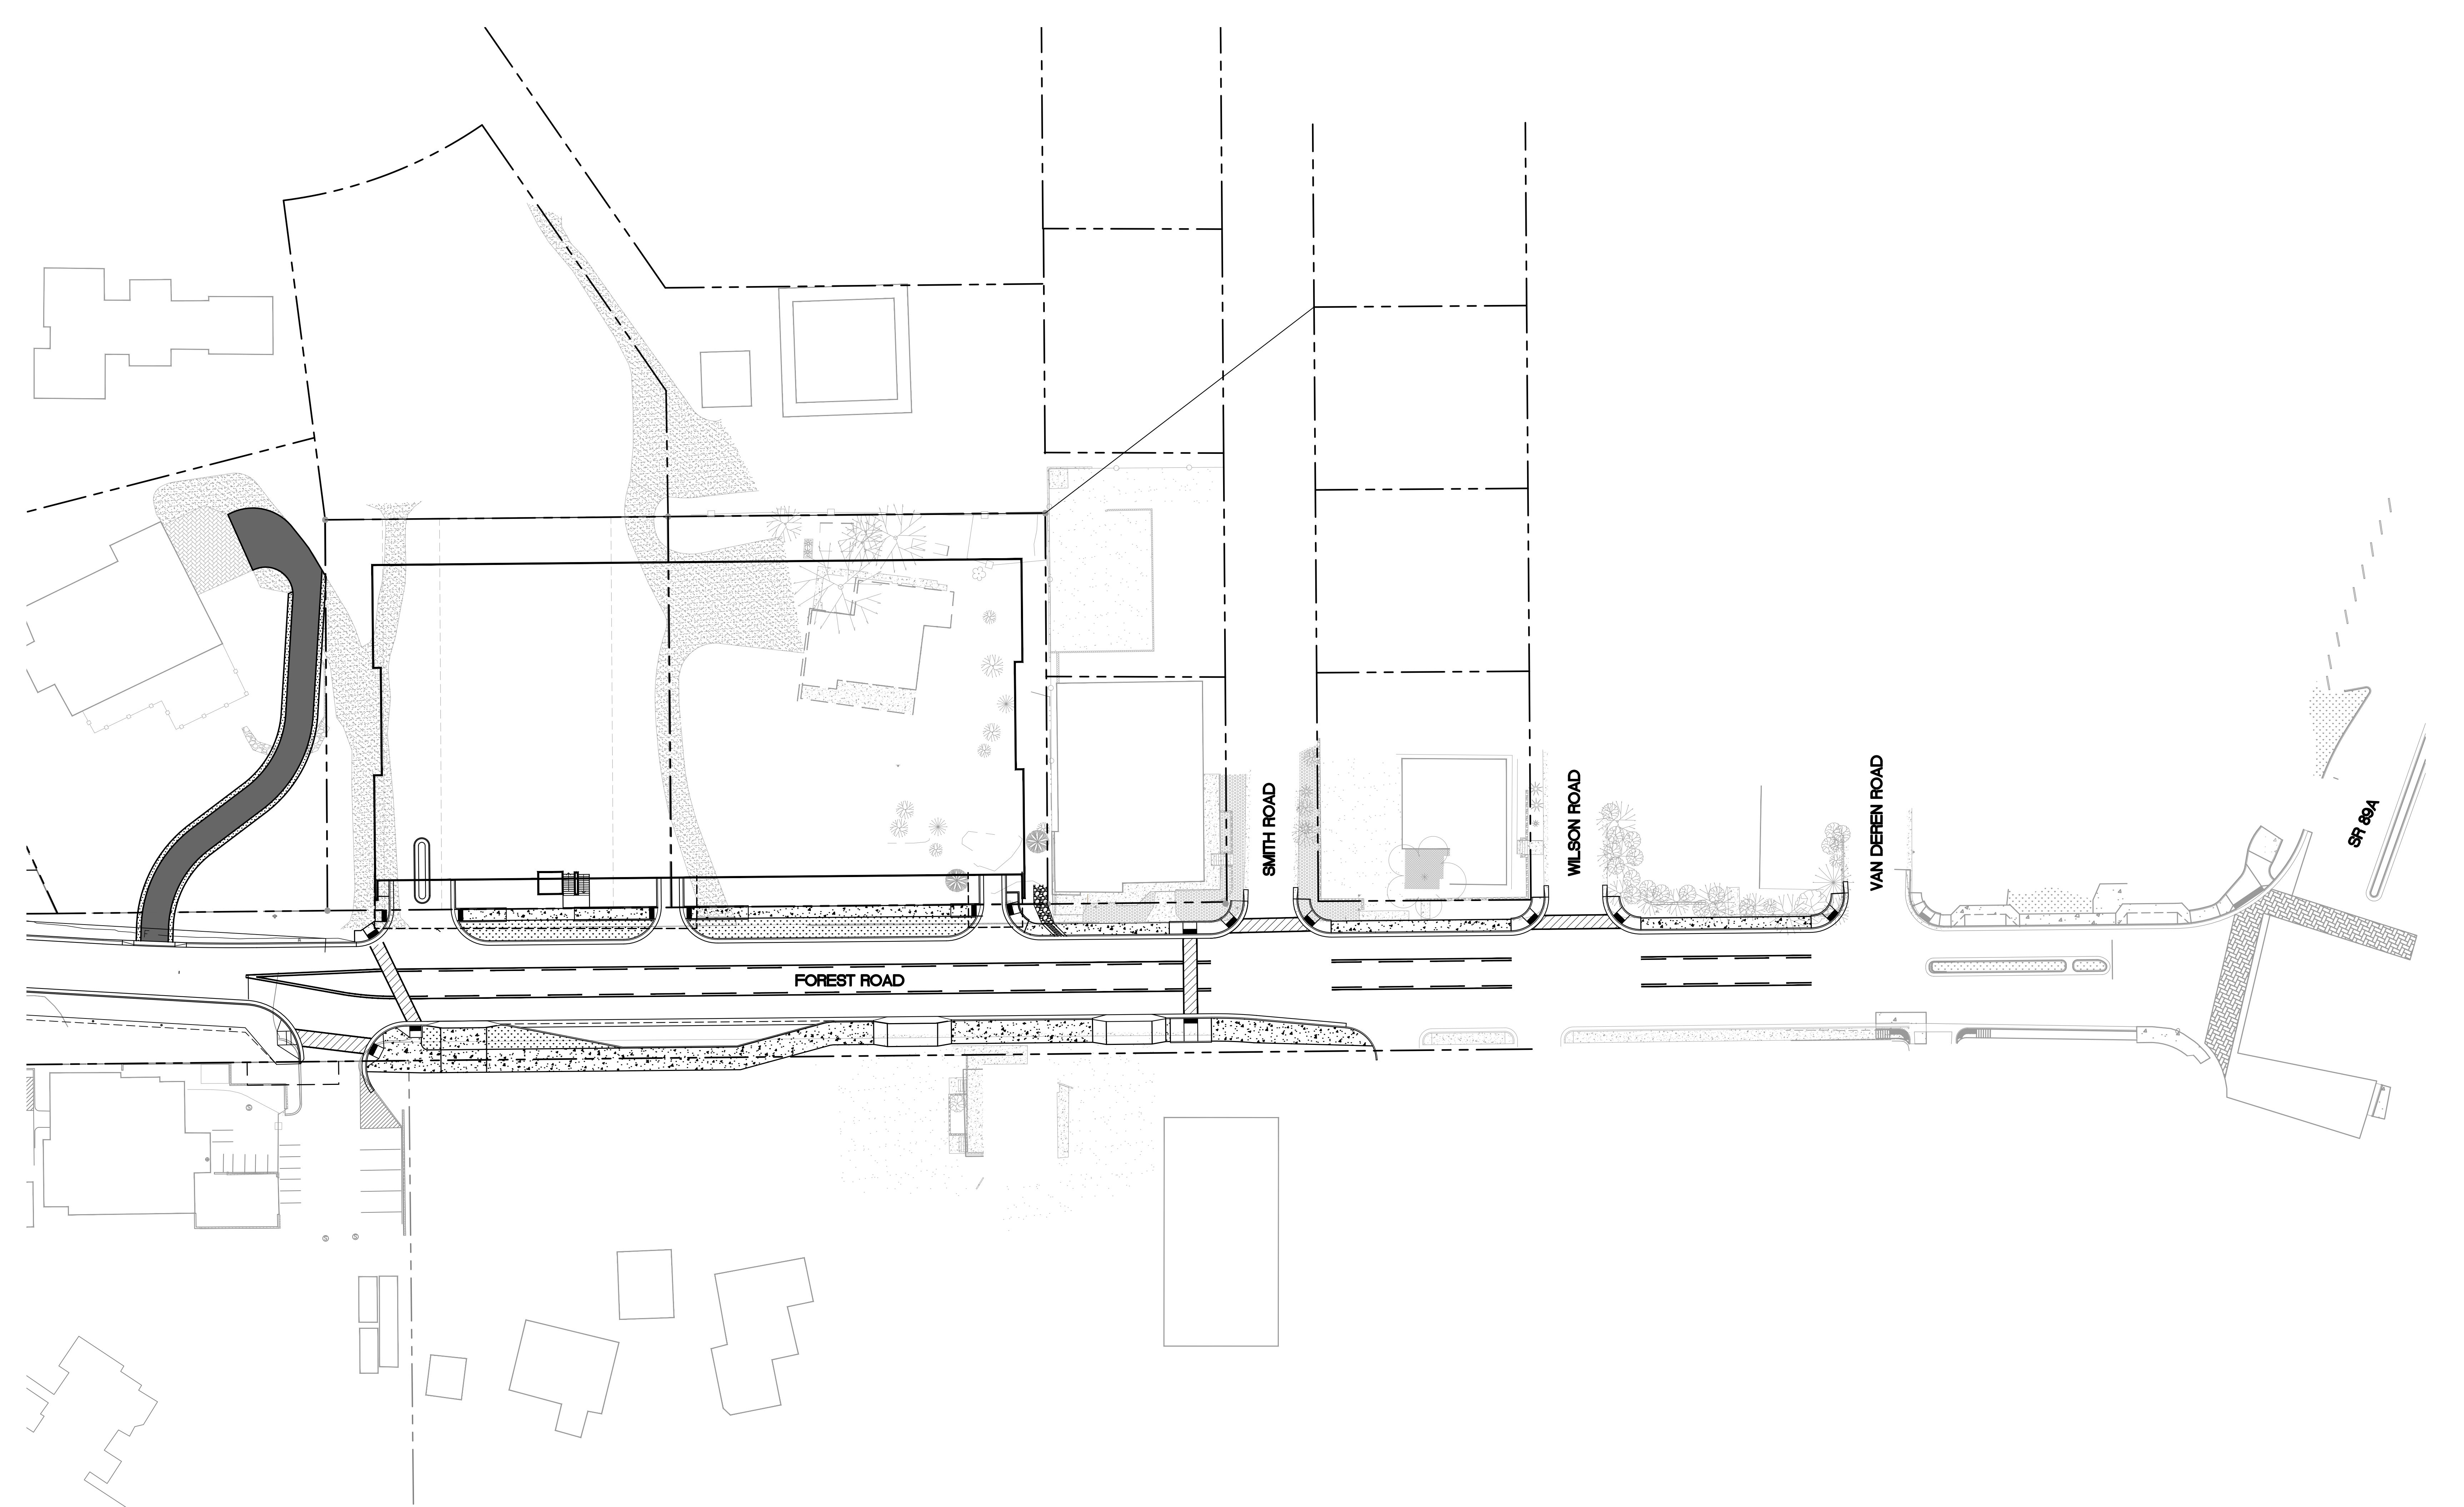



| Lane Group | EBL | EBR | NBL | NBT | SBT | SBR |
|----------------------------|-------|-------|-------|-------|-------|-------|
| Lane Configurations | ↑ ↗ | ↗ ↘ | ↖ ↗ | ↑ ↗ | ↑ ↗ ↘ | ↗ ↘ |
| Traffic Volume (vph) | 101 | 121 | 268 | 614 | 606 | 112 |
| Future Volume (vph) | 101 | 121 | 268 | 614 | 606 | 112 |
| Ideal Flow (vphpl) | 1900 | 1900 | 1900 | 1900 | 1900 | 1900 |
| Storage Length (ft) | 100 | 0 | 0 | | | 50 |
| Storage Lanes | 1 | 1 | 1 | | | 1 |
| Taper Length (ft) | 25 | | 25 | | | |
| Lane Util. Factor | 1.00 | 1.00 | 1.00 | 1.00 | 0.95 | 1.00 |
| Frt | | 0.850 | | | 0.850 | |
| Flt Protected | 0.950 | | 0.950 | | | |
| Satd. Flow (prot) | 1770 | 1583 | 1770 | 1863 | 3539 | 1583 |
| Flt Permitted | 0.950 | | 0.369 | | | |
| Satd. Flow (perm) | 1770 | 1583 | 687 | 1863 | 3539 | 1583 |
| Right Turn on Red | | Yes | | | Yes | |
| Satd. Flow (RTOR) | | 132 | | | 51 | |
| Link Speed (mph) | 30 | | 30 | 30 | | |
| Link Distance (ft) | 270 | | 2184 | 200 | | |
| Travel Time (s) | 6.1 | | 49.6 | 4.5 | | |
| Peak Hour Factor | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 |
| Heavy Vehicles (%) | 2% | 2% | 2% | 2% | 2% | 2% |
| Adj. Flow (vph) | 110 | 132 | 291 | 667 | 659 | 122 |
| Shared Lane Traffic (%) | | | | | | |
| Lane Group Flow (vph) | 110 | 132 | 291 | 667 | 659 | 122 |
| Enter Blocked Intersection | No | No | No | No | No | No |
| Lane Alignment | Left | Right | Left | Left | Left | Right |
| Median Width(ft) | 12 | | 12 | 12 | | |
| Link Offset(ft) | 0 | | 0 | 0 | | |
| Crosswalk Width(ft) | 16 | | 16 | 16 | | |
| Two way Left Turn Lane | Yes | | | | | |
| Headway Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| Turning Speed (mph) | 15 | 9 | 15 | | | 9 |
| Number of Detectors | 1 | 1 | 1 | 2 | 2 | 1 |
| Detector Template | Left | Right | Left | Thru | Thru | Right |
| Leading Detector (ft) | 20 | 20 | 20 | 100 | 100 | 20 |
| Trailing Detector (ft) | 0 | 0 | 0 | 0 | 0 | 0 |
| Detector 1 Position(ft) | 0 | 0 | 0 | 0 | 0 | 0 |
| Detector 1 Size(ft) | 20 | 20 | 20 | 6 | 6 | 20 |
| Detector 1 Type | Cl+Ex | Cl+Ex | Cl+Ex | Cl+Ex | Cl+Ex | Cl+Ex |
| Detector 1 Channel | | | | | | |
| Detector 1 Extend (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector 1 Queue (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector 1 Delay (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector 2 Position(ft) | | | | 94 | 94 | |
| Detector 2 Size(ft) | | | | 6 | 6 | |
| Detector 2 Type | | | | Cl+Ex | Cl+Ex | |
| Detector 2 Channel | | | | | | |
| Detector 2 Extend (s) | | | | 0.0 | 0.0 | |
| Turn Type | Perm | Perm | pm+pt | NA | NA | Perm |
| Protected Phases | | | | 5 | 2 | 6 |



| Lane Group | EBL | EBR | NBL | NBT | SBT | SBR |
|-------------------------|-------|-------|-------|-------|-------|-------|
| Permitted Phases | 4 | 4 | 2 | | | 6 |
| Detector Phase | 4 | 4 | 5 | 2 | 6 | 6 |
| Switch Phase | | | | | | |
| Minimum Initial (s) | 7.0 | 7.0 | 5.0 | 10.0 | 10.0 | 10.0 |
| Minimum Split (s) | 20.0 | 20.0 | 36.0 | 20.0 | 31.7 | 31.7 |
| Total Split (s) | 33.0 | 33.0 | 36.0 | 36.0 | 36.0 | 36.0 |
| Total Split (%) | 31.4% | 31.4% | 34.3% | 34.3% | 34.3% | 34.3% |
| Maximum Green (s) | 27.1 | 27.1 | 30.0 | 30.3 | 30.3 | 30.3 |
| Yellow Time (s) | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 |
| All-Red Time (s) | 2.9 | 2.9 | 3.0 | 2.7 | 2.7 | 2.7 |
| Lost Time Adjust (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Total Lost Time (s) | 5.9 | 5.9 | 6.0 | 5.7 | 5.7 | 5.7 |
| Lead/Lag | | | | | | |
| Lead-Lag Optimize? | | | | | | |
| Vehicle Extension (s) | 1.0 | 1.0 | 2.0 | 2.0 | 2.0 | 2.0 |
| Recall Mode | None | None | None | Min | Ped | Ped |
| Walk Time (s) | | | | 8.0 | 7.0 | 7.0 |
| Flash Dont Walk (s) | | | | 22.0 | 19.0 | 19.0 |
| Pedestrian Calls (#/hr) | | | | 0 | 0 | 0 |
| Act Effect Green (s) | 8.4 | 8.4 | 38.2 | 30.5 | 30.5 | 30.5 |
| Actuated g/C Ratio | 0.13 | 0.13 | 0.59 | 0.47 | 0.47 | 0.47 |
| v/c Ratio | 0.48 | 0.41 | 0.54 | 0.76 | 0.39 | 0.16 |
| Control Delay | 34.5 | 10.1 | 11.3 | 23.0 | 12.8 | 7.9 |
| Queue Delay | 0.0 | 0.0 | 0.0 | 0.0 | 6.6 | 1.0 |
| Total Delay | 34.5 | 10.1 | 11.3 | 23.0 | 19.4 | 8.9 |
| LOS | C | B | B | C | B | A |
| Approach Delay | 21.2 | | | 19.5 | 17.8 | |
| Approach LOS | C | | | B | B | |

Intersection Summary

Area Type: Other

Cycle Length: 105

Actuated Cycle Length: 64.6

Natural Cycle: 90

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.76

Intersection Signal Delay: 19.0

Intersection LOS: B

Intersection Capacity Utilization 52.1%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 1: SR-89A & Forest Road





| Lane Group | EBL | EBR | NBL | NBT | SBT | SBR |
|----------------------------|-------|-------|-------|-------|-------|-------|
| Lane Configurations | ↑ ↗ | ↗ ↘ | ↖ ↗ | ↑ ↗ | ↑↑ ↗ | ↗ ↘ |
| Traffic Volume (vph) | 105 | 155 | 302 | 548 | 540 | 116 |
| Future Volume (vph) | 105 | 155 | 302 | 548 | 540 | 116 |
| Ideal Flow (vphpl) | 1900 | 1900 | 1900 | 1900 | 1900 | 1900 |
| Storage Length (ft) | 100 | 0 | 0 | | | 50 |
| Storage Lanes | 1 | 1 | 1 | | | 1 |
| Taper Length (ft) | 25 | | 25 | | | |
| Lane Util. Factor | 1.00 | 1.00 | 1.00 | 1.00 | 0.95 | 1.00 |
| Frt | | 0.850 | | | 0.850 | |
| Flt Protected | 0.950 | | 0.950 | | | |
| Satd. Flow (prot) | 1770 | 1583 | 1770 | 1863 | 3539 | 1583 |
| Flt Permitted | 0.950 | | 0.411 | | | |
| Satd. Flow (perm) | 1770 | 1583 | 766 | 1863 | 3539 | 1583 |
| Right Turn on Red | | Yes | | | Yes | |
| Satd. Flow (RTOR) | | 168 | | | 59 | |
| Link Speed (mph) | 30 | | 30 | 30 | | |
| Link Distance (ft) | 270 | | 2184 | 200 | | |
| Travel Time (s) | 6.1 | | 49.6 | 4.5 | | |
| Peak Hour Factor | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 |
| Heavy Vehicles (%) | 2% | 2% | 2% | 2% | 2% | 2% |
| Adj. Flow (vph) | 114 | 168 | 328 | 596 | 587 | 126 |
| Shared Lane Traffic (%) | | | | | | |
| Lane Group Flow (vph) | 114 | 168 | 328 | 596 | 587 | 126 |
| Enter Blocked Intersection | No | No | No | No | No | No |
| Lane Alignment | Left | Right | Left | Left | Left | Right |
| Median Width(ft) | 12 | | 12 | 12 | | |
| Link Offset(ft) | 0 | | 0 | 0 | | |
| Crosswalk Width(ft) | 16 | | 16 | 16 | | |
| Two way Left Turn Lane | Yes | | | | | |
| Headway Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| Turning Speed (mph) | 15 | 9 | 15 | | | 9 |
| Number of Detectors | 1 | 1 | 1 | 2 | 2 | 1 |
| Detector Template | Left | Right | Left | Thru | Thru | Right |
| Leading Detector (ft) | 20 | 20 | 20 | 100 | 100 | 20 |
| Trailing Detector (ft) | 0 | 0 | 0 | 0 | 0 | 0 |
| Detector 1 Position(ft) | 0 | 0 | 0 | 0 | 0 | 0 |
| Detector 1 Size(ft) | 20 | 20 | 20 | 6 | 6 | 20 |
| Detector 1 Type | Cl+Ex | Cl+Ex | Cl+Ex | Cl+Ex | Cl+Ex | Cl+Ex |
| Detector 1 Channel | | | | | | |
| Detector 1 Extend (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector 1 Queue (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector 1 Delay (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector 2 Position(ft) | | | | 94 | 94 | |
| Detector 2 Size(ft) | | | | 6 | 6 | |
| Detector 2 Type | | | | Cl+Ex | Cl+Ex | |
| Detector 2 Channel | | | | | | |
| Detector 2 Extend (s) | | | | 0.0 | 0.0 | |
| Turn Type | Perm | Perm | pm+pt | NA | NA | Perm |
| Protected Phases | | | | 5 | 2 | 6 |



| Lane Group | EBL | EBR | NBL | NBT | SBT | SBR |
|-------------------------|-------|-------|-------|-------|-------|-------|
| Permitted Phases | 4 | 4 | 2 | | | 6 |
| Detector Phase | 4 | 4 | 5 | 2 | 6 | 6 |
| Switch Phase | | | | | | |
| Minimum Initial (s) | 7.0 | 7.0 | 5.0 | 10.0 | 10.0 | 10.0 |
| Minimum Split (s) | 20.0 | 20.0 | 36.0 | 20.0 | 31.7 | 31.7 |
| Total Split (s) | 33.0 | 33.0 | 36.0 | 36.0 | 36.0 | 36.0 |
| Total Split (%) | 31.4% | 31.4% | 34.3% | 34.3% | 34.3% | 34.3% |
| Maximum Green (s) | 27.1 | 27.1 | 30.0 | 30.3 | 30.3 | 30.3 |
| Yellow Time (s) | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 |
| All-Red Time (s) | 2.9 | 2.9 | 3.0 | 2.7 | 2.7 | 2.7 |
| Lost Time Adjust (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Total Lost Time (s) | 5.9 | 5.9 | 6.0 | 5.7 | 5.7 | 5.7 |
| Lead/Lag | | | | | | |
| Lead-Lag Optimize? | | | | | | |
| Vehicle Extension (s) | 1.0 | 1.0 | 2.0 | 2.0 | 2.0 | 2.0 |
| Recall Mode | None | None | None | Min | Ped | Ped |
| Walk Time (s) | | | | 8.0 | 7.0 | 7.0 |
| Flash Dont Walk (s) | | | | 22.0 | 19.0 | 19.0 |
| Pedestrian Calls (#/hr) | | | | 0 | 0 | 0 |
| Act Effect Green (s) | 8.5 | 8.5 | 38.3 | 30.5 | 30.5 | 30.5 |
| Actuated g/C Ratio | 0.13 | 0.13 | 0.59 | 0.47 | 0.47 | 0.47 |
| v/c Ratio | 0.49 | 0.48 | 0.57 | 0.68 | 0.35 | 0.16 |
| Control Delay | 34.6 | 10.1 | 11.5 | 20.0 | 12.6 | 7.6 |
| Queue Delay | 0.0 | 0.0 | 0.0 | 0.0 | 4.0 | 1.0 |
| Total Delay | 34.6 | 10.1 | 11.5 | 20.0 | 16.6 | 8.5 |
| LOS | C | B | B | C | B | A |
| Approach Delay | 20.0 | | | 17.0 | 15.2 | |
| Approach LOS | B | | | B | B | |

Intersection Summary

Area Type: Other

Cycle Length: 105

Actuated Cycle Length: 64.8

Natural Cycle: 90

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.68

Intersection Signal Delay: 16.8

Intersection LOS: B

Intersection Capacity Utilization 52.2%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 1: SR-89A & Forest Road



| Intersection | | | | | | |
|--------------------------|--------|--------|--------|-------|-------|-------|
| Int Delay, s/veh | 0.9 | | | | | |
| Movement | EBL | EBT | WBT | WBR | SBL | SBR |
| Lane Configurations | | ↑ | ↑ | ↖ | ↗ | |
| Traffic Vol, veh/h | 0 | 260 | 408 | 0 | 40 | 10 |
| Future Vol, veh/h | 0 | 260 | 408 | 0 | 40 | 10 |
| Conflicting Peds, #/hr | 0 | 0 | 0 | 0 | 0 | 0 |
| Sign Control | Free | Free | Free | Free | Stop | Stop |
| RT Channelized | - | None | - | None | - | None |
| Storage Length | - | - | - | - | 0 | 0 |
| Veh in Median Storage, # | - | 0 | 0 | - | 0 | - |
| Grade, % | - | 0 | 0 | - | 0 | - |
| Peak Hour Factor | 90 | 90 | 90 | 90 | 90 | 90 |
| Heavy Vehicles, % | 3 | 3 | 3 | 3 | 3 | 3 |
| Mvmt Flow | 0 | 289 | 453 | 0 | 44 | 11 |
| Major/Minor | Major1 | Major2 | Minor2 | | | |
| Conflicting Flow All | - | 0 | - | 0 | 742 | 453 |
| Stage 1 | - | - | - | - | 453 | - |
| Stage 2 | - | - | - | - | 289 | - |
| Critical Hdwy | - | - | - | - | 6.43 | 6.23 |
| Critical Hdwy Stg 1 | - | - | - | - | 5.43 | - |
| Critical Hdwy Stg 2 | - | - | - | - | 5.43 | - |
| Follow-up Hdwy | - | - | - | - | 3.527 | 3.327 |
| Pot Cap-1 Maneuver | 0 | - | - | 0 | 382 | 605 |
| Stage 1 | 0 | - | - | 0 | 638 | - |
| Stage 2 | 0 | - | - | 0 | 758 | - |
| Platoon blocked, % | - | - | - | - | - | - |
| Mov Cap-1 Maneuver | - | - | - | - | 382 | 605 |
| Mov Cap-2 Maneuver | - | - | - | - | 488 | - |
| Stage 1 | - | - | - | - | 638 | - |
| Stage 2 | - | - | - | - | 758 | - |
| Approach | EB | WB | SB | | | |
| HCM Control Delay, s | 0 | 0 | 12.7 | | | |
| HCM LOS | | | B | | | |
| Minor Lane/Major Mvmt | EBT | WBT | SBLn1 | SBLn2 | | |
| Capacity (veh/h) | - | - | 488 | 605 | | |
| HCM Lane V/C Ratio | - | - | 0.091 | 0.018 | | |
| HCM Control Delay (s) | - | - | 13.1 | 11.1 | | |
| HCM Lane LOS | - | - | B | B | | |
| HCM 95th %tile Q(veh) | - | - | 0.3 | 0.1 | | |

Intersection

Int Delay, s/veh 0.6

| Movement | EBL | EBT | WBT | WBR | SBL | SBR |
|--------------------------|------|------|------|------|------|------|
| Lane Configurations | ↖ | ↑ | ↗ | | ↗ | |
| Traffic Vol, veh/h | 50 | 250 | 408 | 50 | 0 | 0 |
| Future Vol, veh/h | 50 | 250 | 408 | 50 | 0 | 0 |
| Conflicting Peds, #/hr | 0 | 0 | 0 | 0 | 0 | 0 |
| Sign Control | Free | Free | Free | Free | Stop | Stop |
| RT Channelized | - | None | - | None | - | None |
| Storage Length | 50 | - | - | - | - | 0 |
| Veh in Median Storage, # | - | 0 | 0 | - | 0 | - |
| Grade, % | - | 0 | 0 | - | 0 | - |
| Peak Hour Factor | 90 | 90 | 90 | 90 | 90 | 90 |
| Heavy Vehicles, % | 3 | 3 | 3 | 3 | 3 | 3 |
| Mvmt Flow | 56 | 278 | 453 | 56 | 0 | 0 |

| Major/Minor | Major1 | Major2 | Minor2 | | |
|----------------------|--------|--------|--------|---|-------|
| Conflicting Flow All | 509 | 0 | - | 0 | - |
| Stage 1 | - | - | - | - | - |
| Stage 2 | - | - | - | - | - |
| Critical Hdwy | 4.13 | - | - | - | 6.23 |
| Critical Hdwy Stg 1 | - | - | - | - | - |
| Critical Hdwy Stg 2 | - | - | - | - | - |
| Follow-up Hdwy | 2.227 | - | - | - | 3.327 |
| Pot Cap-1 Maneuver | 1051 | - | - | 0 | 583 |
| Stage 1 | - | - | - | 0 | - |
| Stage 2 | - | - | - | 0 | - |
| Platoon blocked, % | - | - | - | - | - |
| Mov Cap-1 Maneuver | 1051 | - | - | - | 583 |
| Mov Cap-2 Maneuver | - | - | - | - | - |
| Stage 1 | - | - | - | - | - |
| Stage 2 | - | - | - | - | - |

| Approach | EB | WB | SB | | |
|----------------------|-----|----|----|--|--|
| HCM Control Delay, s | 1.4 | 0 | 0 | | |
| HCM LOS | | | A | | |

| Minor Lane/Major Mvmt | EBL | EBT | WBT | WBR | SBLn1 | |
|-----------------------|-------|-----|-----|-----|-------|---|
| Capacity (veh/h) | 1051 | - | - | - | - | - |
| HCM Lane V/C Ratio | 0.053 | - | - | - | - | - |
| HCM Control Delay (s) | 8.6 | - | - | - | 0 | - |
| HCM Lane LOS | A | - | - | - | - | A |
| HCM 95th %tile Q(veh) | 0.2 | - | - | - | - | - |

| Intersection | | | | | | |
|--------------------------|--------|--------|--------|------|-------|-------|
| Int Delay, s/veh | 0.8 | | | | | |
| Movement | EBL | EBT | WBT | WBR | SBL | SBR |
| Lane Configurations | | ↑ | ↑ | | ↘ | |
| Traffic Vol, veh/h | 0 | 250 | 418 | 0 | 10 | 40 |
| Future Vol, veh/h | 0 | 250 | 418 | 0 | 10 | 40 |
| Conflicting Peds, #/hr | 0 | 0 | 0 | 0 | 0 | 0 |
| Sign Control | Free | Free | Free | Free | Stop | Stop |
| RT Channelized | - | None | - | None | - | None |
| Storage Length | - | - | - | - | 0 | - |
| Veh in Median Storage, # | - | 0 | 0 | - | 0 | - |
| Grade, % | - | 0 | 0 | - | 0 | - |
| Peak Hour Factor | 90 | 90 | 90 | 90 | 90 | 90 |
| Heavy Vehicles, % | 3 | 3 | 3 | 3 | 3 | 3 |
| Mvmt Flow | 0 | 278 | 464 | 0 | 11 | 44 |
| Major/Minor | Major1 | Major2 | Minor2 | | | |
| Conflicting Flow All | - | 0 | - | 0 | 742 | 464 |
| Stage 1 | - | - | - | - | 464 | - |
| Stage 2 | - | - | - | - | 278 | - |
| Critical Hdwy | - | - | - | - | 6.43 | 6.23 |
| Critical Hdwy Stg 1 | - | - | - | - | 5.43 | - |
| Critical Hdwy Stg 2 | - | - | - | - | 5.43 | - |
| Follow-up Hdwy | - | - | - | - | 3.527 | 3.327 |
| Pot Cap-1 Maneuver | 0 | - | - | 0 | 382 | 596 |
| Stage 1 | 0 | - | - | 0 | 631 | - |
| Stage 2 | 0 | - | - | 0 | 767 | - |
| Platoon blocked, % | - | - | - | - | - | - |
| Mov Cap-1 Maneuver | - | - | - | - | 382 | 596 |
| Mov Cap-2 Maneuver | - | - | - | - | 487 | - |
| Stage 1 | - | - | - | - | 631 | - |
| Stage 2 | - | - | - | - | 767 | - |
| Approach | EB | WB | SB | | | |
| HCM Control Delay, s | 0 | 0 | 12 | | | |
| HCM LOS | | | B | | | |
| Minor Lane/Major Mvmt | EBT | WBT | SBLn1 | | | |
| Capacity (veh/h) | - | - | 570 | | | |
| HCM Lane V/C Ratio | - | - | 0.097 | | | |
| HCM Control Delay (s) | - | - | 12 | | | |
| HCM Lane LOS | - | - | B | | | |
| HCM 95th %tile Q(veh) | - | - | 0.3 | | | |



| Lane Group | EBL | EBR | NBL | NBT | SBT | SBR |
|----------------------------|-------|-------|-------|-------|-------|-------|
| Lane Configurations | ↑ | ↑ | ↑ | ↑ | ↑↑ | ↑ |
| Traffic Volume (vph) | 112 | 134 | 296 | 678 | 669 | 124 |
| Future Volume (vph) | 112 | 134 | 296 | 678 | 669 | 124 |
| Ideal Flow (vphpl) | 1900 | 1900 | 1900 | 1900 | 1900 | 1900 |
| Storage Length (ft) | 100 | 0 | 0 | | | 50 |
| Storage Lanes | 1 | 1 | 1 | | | 1 |
| Taper Length (ft) | 25 | | 25 | | | |
| Lane Util. Factor | 1.00 | 1.00 | 1.00 | 1.00 | 0.95 | 1.00 |
| Frt | | 0.850 | | | 0.850 | |
| Flt Protected | 0.950 | | 0.950 | | | |
| Satd. Flow (prot) | 1770 | 1583 | 1770 | 1863 | 3539 | 1583 |
| Flt Permitted | 0.950 | | 0.322 | | | |
| Satd. Flow (perm) | 1770 | 1583 | 600 | 1863 | 3539 | 1583 |
| Right Turn on Red | | Yes | | | Yes | |
| Satd. Flow (RTOR) | | 146 | | | 51 | |
| Link Speed (mph) | 30 | | 30 | 30 | | |
| Link Distance (ft) | 270 | | 2184 | 200 | | |
| Travel Time (s) | 6.1 | | 49.6 | 4.5 | | |
| Peak Hour Factor | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 |
| Heavy Vehicles (%) | 2% | 2% | 2% | 2% | 2% | 2% |
| Adj. Flow (vph) | 122 | 146 | 322 | 737 | 727 | 135 |
| Shared Lane Traffic (%) | | | | | | |
| Lane Group Flow (vph) | 122 | 146 | 322 | 737 | 727 | 135 |
| Enter Blocked Intersection | No | No | No | No | No | No |
| Lane Alignment | Left | Right | Left | Left | Left | Right |
| Median Width(ft) | 12 | | 12 | 12 | | |
| Link Offset(ft) | 0 | | 0 | 0 | | |
| Crosswalk Width(ft) | 16 | | 16 | 16 | | |
| Two way Left Turn Lane | Yes | | | | | |
| Headway Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| Turning Speed (mph) | 15 | 9 | 15 | | | 9 |
| Number of Detectors | 1 | 1 | 1 | 2 | 2 | 1 |
| Detector Template | Left | Right | Left | Thru | Thru | Right |
| Leading Detector (ft) | 20 | 20 | 20 | 100 | 100 | 20 |
| Trailing Detector (ft) | 0 | 0 | 0 | 0 | 0 | 0 |
| Detector 1 Position(ft) | 0 | 0 | 0 | 0 | 0 | 0 |
| Detector 1 Size(ft) | 20 | 20 | 20 | 6 | 6 | 20 |
| Detector 1 Type | Cl+Ex | Cl+Ex | Cl+Ex | Cl+Ex | Cl+Ex | Cl+Ex |
| Detector 1 Channel | | | | | | |
| Detector 1 Extend (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector 1 Queue (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector 1 Delay (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector 2 Position(ft) | | | | 94 | 94 | |
| Detector 2 Size(ft) | | | | 6 | 6 | |
| Detector 2 Type | | | | Cl+Ex | Cl+Ex | |
| Detector 2 Channel | | | | | | |
| Detector 2 Extend (s) | | | | 0.0 | 0.0 | |
| Turn Type | Perm | Perm | pm+pt | NA | NA | Perm |
| Protected Phases | | | | 5 | 2 | 6 |



| Lane Group | EBL | EBR | NBL | NBT | SBT | SBR |
|-------------------------|-------|-------|-------|-------|-------|-------|
| Permitted Phases | 4 | 4 | 2 | | | 6 |
| Detector Phase | 4 | 4 | 5 | 2 | 6 | 6 |
| Switch Phase | | | | | | |
| Minimum Initial (s) | 7.0 | 7.0 | 5.0 | 10.0 | 10.0 | 10.0 |
| Minimum Split (s) | 20.0 | 20.0 | 36.0 | 20.0 | 31.7 | 31.7 |
| Total Split (s) | 33.0 | 33.0 | 36.0 | 36.0 | 36.0 | 36.0 |
| Total Split (%) | 31.4% | 31.4% | 34.3% | 34.3% | 34.3% | 34.3% |
| Maximum Green (s) | 27.1 | 27.1 | 30.0 | 30.3 | 30.3 | 30.3 |
| Yellow Time (s) | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 |
| All-Red Time (s) | 2.9 | 2.9 | 3.0 | 2.7 | 2.7 | 2.7 |
| Lost Time Adjust (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Total Lost Time (s) | 5.9 | 5.9 | 6.0 | 5.7 | 5.7 | 5.7 |
| Lead/Lag | | | | | | |
| Lead-Lag Optimize? | | | | | | |
| Vehicle Extension (s) | 1.0 | 1.0 | 2.0 | 2.0 | 2.0 | 2.0 |
| Recall Mode | None | None | None | Min | Ped | Ped |
| Walk Time (s) | | | | 8.0 | 7.0 | 7.0 |
| Flash Dont Walk (s) | | | | 22.0 | 19.0 | 19.0 |
| Pedestrian Calls (#/hr) | | | | 0 | 0 | 0 |
| Act Effect Green (s) | 8.9 | 8.9 | 40.9 | 30.6 | 30.6 | 30.6 |
| Actuated g/C Ratio | 0.13 | 0.13 | 0.60 | 0.45 | 0.45 | 0.45 |
| v/c Ratio | 0.53 | 0.44 | 0.59 | 0.88 | 0.46 | 0.18 |
| Control Delay | 37.3 | 10.2 | 14.2 | 33.5 | 15.3 | 9.7 |
| Queue Delay | 0.0 | 0.0 | 0.0 | 0.0 | 18.0 | 1.1 |
| Total Delay | 37.3 | 10.2 | 14.2 | 33.5 | 33.3 | 10.8 |
| LOS | D | B | B | C | C | B |
| Approach Delay | 22.5 | | | 27.7 | 29.8 | |
| Approach LOS | C | | | C | C | |

Intersection Summary

Area Type: Other

Cycle Length: 105

Actuated Cycle Length: 67.9

Natural Cycle: 100

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.88

Intersection Signal Delay: 27.9

Intersection LOS: C

Intersection Capacity Utilization 55.8%

ICU Level of Service B

Analysis Period (min) 15

Splits and Phases: 1: SR-89A & Forest Road





| Lane Group | EBL | EBR | NBL | NBT | SBT | SBR |
|----------------------------|-------|-------|-------|-------|-------|-------|
| Lane Configurations | ↑ ↙ | ↑ ↙ | ↗ ↘ | ↑ | ↑↑ ↙ | ↗ |
| Traffic Volume (vph) | 116 | 171 | 333 | 605 | 596 | 128 |
| Future Volume (vph) | 116 | 171 | 333 | 605 | 596 | 128 |
| Ideal Flow (vphpl) | 1900 | 1900 | 1900 | 1900 | 1900 | 1900 |
| Storage Length (ft) | 100 | 0 | 0 | | | 50 |
| Storage Lanes | 1 | 1 | 1 | | | 1 |
| Taper Length (ft) | 25 | | 25 | | | |
| Lane Util. Factor | 1.00 | 1.00 | 1.00 | 1.00 | 0.95 | 1.00 |
| Frt | | 0.850 | | | 0.850 | |
| Flt Protected | 0.950 | | 0.950 | | | |
| Satd. Flow (prot) | 1770 | 1583 | 1770 | 1863 | 3539 | 1583 |
| Flt Permitted | 0.950 | | 0.366 | | | |
| Satd. Flow (perm) | 1770 | 1583 | 682 | 1863 | 3539 | 1583 |
| Right Turn on Red | | Yes | | | Yes | |
| Satd. Flow (RTOR) | | 186 | | | 59 | |
| Link Speed (mph) | 30 | | 30 | 30 | | |
| Link Distance (ft) | 270 | | 2184 | 200 | | |
| Travel Time (s) | 6.1 | | 49.6 | 4.5 | | |
| Peak Hour Factor | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 |
| Heavy Vehicles (%) | 2% | 2% | 2% | 2% | 2% | 2% |
| Adj. Flow (vph) | 126 | 186 | 362 | 658 | 648 | 139 |
| Shared Lane Traffic (%) | | | | | | |
| Lane Group Flow (vph) | 126 | 186 | 362 | 658 | 648 | 139 |
| Enter Blocked Intersection | No | No | No | No | No | No |
| Lane Alignment | Left | Right | Left | Left | Left | Right |
| Median Width(ft) | 12 | | 12 | 12 | | |
| Link Offset(ft) | 0 | | 0 | 0 | | |
| Crosswalk Width(ft) | 16 | | 16 | 16 | | |
| Two way Left Turn Lane | Yes | | | | | |
| Headway Factor | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| Turning Speed (mph) | 15 | 9 | 15 | | | 9 |
| Number of Detectors | 1 | 1 | 1 | 2 | 2 | 1 |
| Detector Template | Left | Right | Left | Thru | Thru | Right |
| Leading Detector (ft) | 20 | 20 | 20 | 100 | 100 | 20 |
| Trailing Detector (ft) | 0 | 0 | 0 | 0 | 0 | 0 |
| Detector 1 Position(ft) | 0 | 0 | 0 | 0 | 0 | 0 |
| Detector 1 Size(ft) | 20 | 20 | 20 | 6 | 6 | 20 |
| Detector 1 Type | Cl+Ex | Cl+Ex | Cl+Ex | Cl+Ex | Cl+Ex | Cl+Ex |
| Detector 1 Channel | | | | | | |
| Detector 1 Extend (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector 1 Queue (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector 1 Delay (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Detector 2 Position(ft) | | | | 94 | 94 | |
| Detector 2 Size(ft) | | | | 6 | 6 | |
| Detector 2 Type | | | | Cl+Ex | Cl+Ex | |
| Detector 2 Channel | | | | | | |
| Detector 2 Extend (s) | | | | 0.0 | 0.0 | |
| Turn Type | Perm | Perm | pm+pt | NA | NA | Perm |
| Protected Phases | | | | 5 | 2 | 6 |



| Lane Group | EBL | EBR | NBL | NBT | SBT | SBR |
|-------------------------|-------|-------|-------|-------|-------|-------|
| Permitted Phases | 4 | 4 | 2 | | | 6 |
| Detector Phase | 4 | 4 | 5 | 2 | 6 | 6 |
| Switch Phase | | | | | | |
| Minimum Initial (s) | 7.0 | 7.0 | 5.0 | 10.0 | 10.0 | 10.0 |
| Minimum Split (s) | 20.0 | 20.0 | 36.0 | 20.0 | 31.7 | 31.7 |
| Total Split (s) | 33.0 | 33.0 | 36.0 | 36.0 | 36.0 | 36.0 |
| Total Split (%) | 31.4% | 31.4% | 34.3% | 34.3% | 34.3% | 34.3% |
| Maximum Green (s) | 27.1 | 27.1 | 30.0 | 30.3 | 30.3 | 30.3 |
| Yellow Time (s) | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 |
| All-Red Time (s) | 2.9 | 2.9 | 3.0 | 2.7 | 2.7 | 2.7 |
| Lost Time Adjust (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Total Lost Time (s) | 5.9 | 5.9 | 6.0 | 5.7 | 5.7 | 5.7 |
| Lead/Lag | | | | | | |
| Lead-Lag Optimize? | | | | | | |
| Vehicle Extension (s) | 1.0 | 1.0 | 2.0 | 2.0 | 2.0 | 2.0 |
| Recall Mode | None | None | None | Min | Ped | Ped |
| Walk Time (s) | | | | 8.0 | 7.0 | 7.0 |
| Flash Dont Walk (s) | | | | 22.0 | 19.0 | 19.0 |
| Pedestrian Calls (#/hr) | | | | 0 | 0 | 0 |
| Act Effect Green (s) | 9.1 | 9.1 | 41.0 | 30.7 | 30.7 | 30.7 |
| Actuated g/C Ratio | 0.13 | 0.13 | 0.60 | 0.45 | 0.45 | 0.45 |
| v/c Ratio | 0.53 | 0.50 | 0.63 | 0.79 | 0.41 | 0.19 |
| Control Delay | 37.6 | 10.2 | 14.5 | 26.9 | 15.0 | 9.3 |
| Queue Delay | 0.0 | 0.0 | 0.0 | 0.0 | 7.7 | 1.1 |
| Total Delay | 37.6 | 10.2 | 14.5 | 26.9 | 22.7 | 10.5 |
| LOS | D | B | B | C | C | B |
| Approach Delay | 21.3 | | | 22.5 | 20.5 | |
| Approach LOS | C | | | C | C | |

Intersection Summary

Area Type: Other

Cycle Length: 105

Actuated Cycle Length: 68.2

Natural Cycle: 90

Control Type: Actuated-Uncoordinated

Maximum v/c Ratio: 0.79

Intersection Signal Delay: 21.6

Intersection LOS: C

Intersection Capacity Utilization 56.0%

ICU Level of Service B

Analysis Period (min) 15

Splits and Phases: 1: SR-89A & Forest Road



| Intersection | | | | | | |
|--------------------------|--------|--------|--------|-------|-------|-------|
| Int Delay, s/veh | 0.9 | | | | | |
| Movement | EBL | EBT | WBT | WBR | SBL | SBR |
| Lane Configurations | | ↑ | ↑ | ↖ | ↗ | |
| Traffic Vol, veh/h | 0 | 287 | 450 | 0 | 44 | 11 |
| Future Vol, veh/h | 0 | 287 | 450 | 0 | 44 | 11 |
| Conflicting Peds, #/hr | 0 | 0 | 0 | 0 | 0 | 0 |
| Sign Control | Free | Free | Free | Free | Stop | Stop |
| RT Channelized | - | None | - | None | - | None |
| Storage Length | - | - | - | - | 0 | 0 |
| Veh in Median Storage, # | - | 0 | 0 | - | 0 | - |
| Grade, % | - | 0 | 0 | - | 0 | - |
| Peak Hour Factor | 90 | 90 | 90 | 90 | 90 | 90 |
| Heavy Vehicles, % | 3 | 3 | 3 | 3 | 3 | 3 |
| Mvmt Flow | 0 | 319 | 500 | 0 | 49 | 12 |
| Major/Minor | Major1 | Major2 | Minor2 | | | |
| Conflicting Flow All | - | 0 | - | 0 | 819 | 500 |
| Stage 1 | - | - | - | - | 500 | - |
| Stage 2 | - | - | - | - | 319 | - |
| Critical Hdwy | - | - | - | - | 6.43 | 6.23 |
| Critical Hdwy Stg 1 | - | - | - | - | 5.43 | - |
| Critical Hdwy Stg 2 | - | - | - | - | 5.43 | - |
| Follow-up Hdwy | - | - | - | - | 3.527 | 3.327 |
| Pot Cap-1 Maneuver | 0 | - | - | 0 | 344 | 569 |
| Stage 1 | 0 | - | - | 0 | 607 | - |
| Stage 2 | 0 | - | - | 0 | 735 | - |
| Platoon blocked, % | - | - | - | - | - | - |
| Mov Cap-1 Maneuver | - | - | - | - | 344 | 569 |
| Mov Cap-2 Maneuver | - | - | - | - | 458 | - |
| Stage 1 | - | - | - | - | 607 | - |
| Stage 2 | - | - | - | - | 735 | - |
| Approach | EB | WB | SB | | | |
| HCM Control Delay, s | 0 | 0 | 13.3 | | | |
| HCM LOS | | | B | | | |
| Minor Lane/Major Mvmt | EBT | WBT | SBLn1 | SBLn2 | | |
| Capacity (veh/h) | - | - | 458 | 569 | | |
| HCM Lane V/C Ratio | - | - | 0.107 | 0.021 | | |
| HCM Control Delay (s) | - | - | 13.8 | 11.5 | | |
| HCM Lane LOS | - | - | B | B | | |
| HCM 95th %tile Q(veh) | - | - | 0.4 | 0.1 | | |

Intersection

Int Delay, s/veh 0.6

| Movement | EBL | EBT | WBT | WBR | SBL | SBR |
|--------------------------|------|------|------|------|------|------|
| Lane Configurations | ↖ | ↑ | ↗ | | ↗ | |
| Traffic Vol, veh/h | 55 | 276 | 450 | 55 | 0 | 0 |
| Future Vol, veh/h | 55 | 276 | 450 | 55 | 0 | 0 |
| Conflicting Peds, #/hr | 0 | 0 | 0 | 0 | 0 | 0 |
| Sign Control | Free | Free | Free | Free | Stop | Stop |
| RT Channelized | - | None | - | None | - | None |
| Storage Length | 50 | - | - | - | - | 0 |
| Veh in Median Storage, # | - | 0 | 0 | - | 0 | - |
| Grade, % | - | 0 | 0 | - | 0 | - |
| Peak Hour Factor | 90 | 90 | 90 | 90 | 90 | 90 |
| Heavy Vehicles, % | 3 | 3 | 3 | 3 | 3 | 3 |
| Mvmt Flow | 61 | 307 | 500 | 61 | 0 | 0 |

| Major/Minor | Major1 | Major2 | Minor2 | |
|----------------------|--------|--------|--------|---------|
| Conflicting Flow All | 561 | 0 | - | 0 - 531 |
| Stage 1 | - | - | - | - |
| Stage 2 | - | - | - | - |
| Critical Hdwy | 4.13 | - | - | - 6.23 |
| Critical Hdwy Stg 1 | - | - | - | - |
| Critical Hdwy Stg 2 | - | - | - | - |
| Follow-up Hdwy | 2.227 | - | - | - 3.327 |
| Pot Cap-1 Maneuver | 1005 | - | - | 0 546 |
| Stage 1 | - | - | - | 0 - |
| Stage 2 | - | - | - | 0 - |
| Platoon blocked, % | - | - | - | - |
| Mov Cap-1 Maneuver | 1005 | - | - | - 546 |
| Mov Cap-2 Maneuver | - | - | - | - |
| Stage 1 | - | - | - | - |
| Stage 2 | - | - | - | - |

| Approach | EB | WB | SB | |
|----------------------|-----|----|----|--|
| HCM Control Delay, s | 1.5 | 0 | 0 | |
| HCM LOS | | | A | |

| Minor Lane/Major Mvmt | EBL | EBT | WBT | WBR | SBLn1 |
|-----------------------|-------|-----|-----|-----|-------|
| Capacity (veh/h) | 1005 | - | - | - | - |
| HCM Lane V/C Ratio | 0.061 | - | - | - | - |
| HCM Control Delay (s) | 8.8 | - | - | - | 0 |
| HCM Lane LOS | A | - | - | - | A |
| HCM 95th %tile Q(veh) | 0.2 | - | - | - | - |

| Intersection | | | | | | |
|--------------------------|--------|--------|--------|------|-------|-------|
| Int Delay, s/veh | 0.9 | | | | | |
| Movement | EBL | EBT | WBT | WBR | SBL | SBR |
| Lane Configurations | | ↑ | ↑ | | Y | |
| Traffic Vol, veh/h | 0 | 276 | 462 | 0 | 11 | 44 |
| Future Vol, veh/h | 0 | 276 | 462 | 0 | 11 | 44 |
| Conflicting Peds, #/hr | 0 | 0 | 0 | 0 | 0 | 0 |
| Sign Control | Free | Free | Free | Free | Stop | Stop |
| RT Channelized | - | None | - | None | - | None |
| Storage Length | - | - | - | - | 0 | - |
| Veh in Median Storage, # | - | 0 | 0 | - | 0 | - |
| Grade, % | - | 0 | 0 | - | 0 | - |
| Peak Hour Factor | 90 | 90 | 90 | 90 | 90 | 90 |
| Heavy Vehicles, % | 3 | 3 | 3 | 3 | 3 | 3 |
| Mvmt Flow | 0 | 307 | 513 | 0 | 12 | 49 |
| Major/Minor | Major1 | Major2 | Minor2 | | | |
| Conflicting Flow All | - | 0 | - | 0 | 820 | 513 |
| Stage 1 | - | - | - | - | 513 | - |
| Stage 2 | - | - | - | - | 307 | - |
| Critical Hdwy | - | - | - | - | 6.43 | 6.23 |
| Critical Hdwy Stg 1 | - | - | - | - | 5.43 | - |
| Critical Hdwy Stg 2 | - | - | - | - | 5.43 | - |
| Follow-up Hdwy | - | - | - | - | 3.527 | 3.327 |
| Pot Cap-1 Maneuver | 0 | - | - | 0 | 343 | 559 |
| Stage 1 | 0 | - | - | 0 | 599 | - |
| Stage 2 | 0 | - | - | 0 | 744 | - |
| Platoon blocked, % | - | - | - | - | - | - |
| Mov Cap-1 Maneuver | - | - | - | - | 343 | 559 |
| Mov Cap-2 Maneuver | - | - | - | - | 456 | - |
| Stage 1 | - | - | - | - | 599 | - |
| Stage 2 | - | - | - | - | 744 | - |
| Approach | EB | WB | SB | | | |
| HCM Control Delay, s | 0 | 0 | 12.6 | | | |
| HCM LOS | | | B | | | |
| Minor Lane/Major Mvmt | EBT | WBT | SBLn1 | | | |
| Capacity (veh/h) | - | - | 535 | | | |
| HCM Lane V/C Ratio | - | - | 0.114 | | | |
| HCM Control Delay (s) | - | - | 12.6 | | | |
| HCM Lane LOS | - | - | B | | | |
| HCM 95th %tile Q(veh) | - | - | 0.4 | | | |